

## U.S. DEPARTMENT OF COMMERCE PATENT &amp; TRADEMARK OFFICE

B/O Form PTO-1390	<b>Transmittal Letter to the United States Designated/Elected Office (DO/EO/US) Concerning a Filing Under 35 USC 371</b>	Attorney's Docket Number YAMA3001/REF/6982
International Application Number PCT/KR00/00151		U.S. Application Number (if known) <b>09/926003</b>
Title of Invention WELDING SOLID WIRE WITH HIGH FEEDING PERFORMANCE	International Filing Date 24 February 2000	Priority Date Claimed 25 February 1999
Applicant(s) for DO/EO/US YAMAOKA et al.		

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items under 35 USC 371:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 USC 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 USC 371.
3. ☒ This express request to begin national examination procedures (35 USC 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 USC 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed 35 USC 371(c)(2).
  - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
  - b. ☒ has been transmitted by the International Bureau.
  - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US).
  - ☐ A translation of the International Application into English (35 USC 371(c)(2)).
  - ☒ Amendments to the claims of the International Application under PCT Article 19 (35 USC 371(c)(3))
    - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
    - b. ☒ have been transmitted by the International Bureau.
    - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
    - d. ☒ have not been made and will not be made.
  - ☐ A translation of the amendments to the claims under PCT Article 19 (35 USC 371(c)(3)).
6. ☒ An oath or declaration of the inventor(s) (35 USC 371(c)(4)). ( ☒ Executed ☐ Unexecuted )
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 USC 371(c)(5)).

Items 11 to 16 below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A **FIRST** preliminary amendment.
  - ☐ A **SECOND** or **SUBSEQUENT** preliminary amendment.
14. ☐ A substitute specification.
15. ☐ A change of power of attorney and/or address letter.
16. ☐ Other items or information:

Application Number (if Known) <b>09/926003</b>		International Application Number		Attorney's Docket Number	
				Calculations	PTO USE ONLY
17. The following fees are submitted:					
<b>Basic National Fee (37 CFR 1.492(a)(1)-(5)):</b>					
<input type="checkbox"/> Search report has been prepared by the EPO or JPO				\$860.00	
<input type="checkbox"/> International Preliminary Examination Fee paid to USPTO (37 CFR 1.482)				\$690.00	
<input type="checkbox"/> No International Preliminary Examination Fee paid to USPTO (37 CFR 1.482)					
<input checked="" type="checkbox"/> but International Search Fee paid to USPTO (37 CFR 1.445(a)(2))				\$710.00	
<input checked="" type="checkbox"/> Neither International Preliminary Examination Fee (37 CFR 1.482) nor					
International Search Fee (37 CFR 1.445(a)(2)) paid to USPTO				\$1000.00	
<input type="checkbox"/> International Preliminary Examination Fee paid to USPTO (37 CFR 1.482)					
and all claims satisfied provisions of PCT Article 33(1)-(4)				\$100.00	\$1,000.00
<b>ENTER APPROPRIATE BASIC FEE AMOUNT</b>				<b>\$</b>	<b>1,000.00</b>
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).					
<b>CLAIMS</b>	<b>NUMBER FILED</b>	<b>NUMBER EXTRA</b>	<b>RATE</b>		
Total Claims	2	-20 =	0	× \$18.00	\$ 0.00
Independent Claims	1	-3 =	0	× \$80.00	\$ 0.00
Multiple Dependent Claims (if applicable)				+ \$270.00	
<b>TOTAL OF ABOVE CALCULATIONS</b>				<b>\$</b>	<b>1,000.00</b>
Reduction by ½ for filing by small entity, if applicable. Small Entity Status is asserted pursuant to 37 CFR 1.27 for this application.					
<b>SUBTOTAL</b>				<b>\$</b>	<b>1,000.00</b>
Processing fee of <b>\$130.00</b> for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(f)).					
<b>TOTAL NATIONAL FEE</b>					
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3.31). <b>\$40.00</b> per property.				\$	40.00
<b>TOTAL FEES ENCLOSED</b>				<b>\$</b>	<b>1,040.00</b>
Amount to be:				Refunded:	
				Charged:	

- a. ☒ A check in the amount of **\$1,040.00** to cover the fees is enclosed.
- b. ☐ Please charge my **Deposit Account Number 02-0200** in the amount of **\$** to cover the above fees.  
A duplicate copy of this sheet is enclosed.
- c. ☒ The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to **Deposit Account Number 02-0200**. A duplicate copy of this sheet is enclosed.

Note: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

**BACON & THOMAS, PLLC**  
625 SLATERS LANE - FOURTH FLOOR  
ALEXANDRIA, VIRGINIA 22314-1176  
(703) 683-0500

DATE: August 13, 2001

Respectfully submitted,

*Richard E. Fichter*

Richard E. Fichter  
Attorney for Applicant  
Registration Number: 26,382

PATENT

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of: :  
YAMAOKA et al. : Attention: PCT OFFICE  
U.S. National Phase of PCT/KR00/00151 :  
Entry papers filed herewith August 13, 2001 :  
For: WELDING SOLID WIRE WITH HIGH FEEDING PERFORMANCE

**PRELIMINARY AMENDMENT**  
**AND INFORMATION DISCLOSURE STATEMENT**

Assistant Commissioner for Patents  
Washington, D.C. 20231

Sir:

The present application is the U.S. national phase of international application number PCT/KR00/00151.

Please amend the above-identified application as follows:

**IN THE SPECIFICATION:**

Please add the attached ABSTRACT OF THE DISCLOSURE to the application.

**REMARKS**

Applicants have amended the application by adding an Abstract of the Disclosure to the application on a separate sheet.

Applicants are submitting herewith a copy of the Search Report which issued on International Application No. PCT/KR00/00151, of which the present application is the U.S. national phase. All of the publications cited in the International Search Report are listed on the attached Form PTO-1449. It is Applicants' understanding that, under the procedures of the PCT, copies of the cited publications will have been supplied to the U.S. Patent Office by the International Bureau. However, the Examiner is invited to contact the undersigned attorney if additional copies are necessary or would facilitate examination of the present application.

Otherwise, the Examiner is respectfully requested to return an initialed and dated copy of the attached Form PTO-1449 to confirm that all publications listed thereon have been considered and made officially of record in the file of this application.

Applicants understand that, under the procedures of the PCT, a copy of the priority document (JP 11/47562, filed 25 February 1999) will have been supplied to the U.S. Patent Office pursuant to Rule 17 of the PCT Regulations. It is therefore respectfully requested that the first Official Action in the present application contain an indication that the appropriate priority document is in the file of this application.

In view of the above amendments, an early action on the application is now in order and is most respectfully requested.

Respectfully submitted,  
BACON & THOMAS, PLLC

By: Richard E. Fichter  
RICHARD E. FICHTER  
Registration No. 26,382

625 Slaters Lane - 4th Floor  
Alexandria, Virginia 22314  
Phone: (703) 683-0500  
Facsimile: (703) 683-1080  
REF:kdd  
PA01.wpd  
DATE: August 11, 2001

WELDING SOLID WIRE WITH HIGH FEEDING PERFORMANCE

## BACKGROUND OF THE INVENTION

5

Field of the invention

The present invention relates to a welding solid wire with high feeding performance and arc stability on welding.

10

Description of the Related Art

Generally, from the viewpoint of improving the quality of a welded bead portion, arc stability on welding is important in a welding wire without regard to the kind of wire such as a solid wire, a flux cored wire or the like. Also, it is generally recognized that arc stability is closely related to feeding performance of the wire.

For example, Japanese Patent Laid-open Publication No. (Sho) 56-144892 discloses a solid wire plated with copper, which improves feeding performance by means of fluid lubricant retained within grooves which are formed on the surface of the wire, and by wet wire drawing work with grain boundary oxidation. Also, Japanese Patent Laid-open Publication No. (Hei) 5-1120 describes that arc stability of a wire may be obtained by performing wet wire drawing work of over one pass prior to plating work and improving adhesive performance of plating by cleaning the wire surface.

It has also been disclosed that improving the properties of lubricant used in wire drawing work stabilizes the feeding performance so that arc stability is improved.

Lately, for solid wires and flux cored wires, Japanese Patent Publication Nos. (Hei) 2-682806 and (Hei) 2-731505 disclose that arc stability is improved by forcing a reduction in the ratio of an apparent surface area calculated from the ratio of the substantial surface area to wire diameter.

It has also been disclosed in Japanese Patent Publication Nos. (Hei) 2-723793 and (Hei) 2-723799 that arc stability is improved by reducing impurities of over 0.2  $\mu\text{m}$  in diameter which adhere to and remain on a wire surface.

The prior art described above relate to properties and conditions of a wire surface.

First, the problems in feeding systems for wires will be considered.

Figs. 1A and 1B show the feeding system for a copper plated solid welding wire, and particularly Fig. 1A and Fig. 1B represent systems using a wire reel and a pail pack, respectively.

A wire 6 is fed from a wire reel 1 or a pail pack 10 into feeding rollers 2 or 9. Then, before feeding to a tip portion 5 of a welding zone, the wire 6 in the wire reel 1 is fed through a guide tool 3 and a cable 4 and the wire 6 in the pail pack 10 is directly fed through the cable 4. Most of cable 4 has a bent portion X or Y and wire 6 contacts with the inner wall of the cable 4, resulting in large resistance which decreases the feeding performance. In addition, the reference numeral 7 in drawings indicates an arc forming a bead between weld zone and the end portion of the wire 6, and the reference numeral 8 indicates a power source.

In addition, referring to Fig. 2 which is a sectional view of the welding tip portion 5, the wire 6 is subjected to large resistance at contact points A, B and C of the inner wall of the tip portion, which affects the feeding performance of the wire.

In the case as described above, it is natural that the change of the properties of the wire surface should affect the feeding performance, i.e. stability of the arc 7 at the end portion of the fed wire 6. However, it is not clear whether the properties of the wire surface relate to the feeding performance. Thus, the matters noted above have required close examination.

As high efficiency for welding has been required lately and the feeding speed of wires tends to increase, higher arc stability is also required, but technical developments for arc stability have not progressed accordingly.

## SUMMARY OF THE INVENTION

The present invention addresses the matters discussed above. It is an object of the present invention to provide a solid welding wire which has high arc stability by stabilizing the feeding performance of the wire upon welding.

It is another object of the present invention to provide a solid welding wire whose surface comprises copper plated film and which has high arc stability and high feeding performance upon welding.

These and other objects will become apparent to one skilled in the art after having the benefit of the following disclosure.

The present invention is directed to an arc welding solid wire whose surface comprises copper plated film, wherein the elastic limit ratio of the finally produced wire is controlled in the range between 50 and 88 %. The elastic limit ratio is defined

as the ratio between elastic limit and tensile strength.

The elastic limit ratio is controlled by installing three to eight elastic limit ratio control vertical rollers and three to eight elastic limit ratio control transverse rollers. The elastic limit ratio control vertical and transverse rollers have a ratio  $D/d$  of 40 to 60, where "D" is roller diameter and "d" is wire diameter, and follow the coil control vertical and transverse rollers after final drawing of the welding solid wire whose surface comprises copper plated film.

### BRIEF DESCRIPTION OF THE DRAWINGS

Figs. 1A and 1B depict feeding systems for a solid welding wire.

Fig. 2 is a cross-sectional view of a welding tip portion.

Fig. 3 is a group of graphs showing relationship between coil properties and the elastic limit ratio and between welding performances and the elastic limit ratio.

Fig. 4 illustrates an arc height that is generated by cutting a wire with a 1-meter chord.

Fig. 5 is a graph showing relationship between stress and elongation ratio of a wire for achieving the elastic limit ratio.

Fig. 6 depicts a conventional coil control vertical and transverse rollers.

Fig. 7 illustrates the elastic limit ratio control rollers of the present invention.

### DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

To achieve the objects of the invention, wire feeding performance was closely examined from a new point of view. The subject matter of the examination was a solid welding wire which had a small change in surface properties as wet wire drawing work is performed after copper plating. The feeding path such as shown in Figs. 1 and 2, and the relationships between the mechanical properties and the feeding performances of the wire itself were also carefully researched. As a result, it was newly discovered that the wire feeding performance is closely related to the mechanical properties of the wire.

That is, the coil properties of a solid wire which is set free after extraction from the reel or the pail pack were compared with the coil properties when the coil is cut after the solid wire is freely fed from the welding tip portion with the welding stopped. From this, it was discovered that wire extracted from the welding tip portion wherein the coil properties are in the specific predetermined range, has good stability

and can be used in welding with good bead. Thus, the present invention is achieved by the discovery that the good stability is closely related to the elastic limit ratio (elastic limit : tensile strength) of the wire.

- That is, the invention relates to a solid welding wire whose surface comprises copper plated film and wherein the ratio between the elastic limit and tensile strength, the elastic limit ratio, is controlled to be in the range between 50 and 88 %, which will be described in the following.

Fig. 3 is a group of graphs showing relationship between coil properties and the elastic limit ratio and between welding performances and the elastic limit ratio. The measurements of arc height  $x$  (mm/m), reduction rate of a coil diameter  $y$  (%), the existence of slag inclusion, the state of meandering beads, a variation of current on welding A, the number of spatters of over 1 mm in diameter (number/10 cm) and the elastic limit ratio shown in Fig. 3 are described as follows.

1) The arc height  $x$  (mm/m):

- After extraction from the pail pack, the solid wire is wound four times around a cylinder of 100 mm in diameter and held for 30 seconds. Then, when it is set free, its arc height is the height of the arc made by cutting the wire into a chord of 1 m.

2) The reduction rate of a coil diameter  $y$  (%):

- After set free from the reel, the diameter of the coil is measured. The wire is then wound twice around a cylinder of 100 mm in diameter and held for 30 seconds. The difference between the coil diameter after it is set free again and the coil diameter before being wound around the cylinder is measured. Thus, the reduction rate of the coil diameter is calculated from the difference in the two coil diameters.

- 3) The existence of slag inclusion, amount of meandering bead, the variation of current on welding and the number of spatters of over 1 mm in diameter:

These are found with performed by flat position welding.

4) The elastic limit ratio

- After a stress-elongation ratio graph is plotted from tensile tests of the solid wire, the elastic limit ratio is derived from the elastic limit as the stress that corresponds to the permanent elongation ratio of 0.05 % in Fig. 5.

For example, Fig. 5 shows the case of the elastic limit ratio (elastic limit/tensile strength) at 102/125 which is 81.6 %.

- As shown by the graphs in Fig. 3, solid wire is easily bent and there is a large change in the linearity of the wire or the diameter of free coil in proportion to the decrease in the elastic limit ratio. This disclosure shows for the first time that, contrary to such a tendency, welding performance is good when the elastic limit ratio



is between 50 and 88 %.

Therefore, in view of the results examined from the tendency, the following facts become clear.

If the elastic limit ratio is low and as the wire is easily bent, both the wire 6 wound around reel 1 with large coil diameter and the almost straight flat wire 6 in pail pack 10 are easily bent and deformed at the cable bending portion X or Y shown in Fig. 1 or at other cable bending portions with large curvature. Thus, the resistance between the wire 6 and the inner wall of the cable 4 is small since wire 6 follows the bent cable 4 easily. However, since the inside of the tip portion 5 shown in Fig. 2 as the final outlet of the wire is a fully straight hole, the bent wire is subjected to large resistance. As a result, the feeding performance of the wire deteriorates so that welding quality becomes poor.

If the elastic limit ratio is high, there is no problem for feeding at tip portion 5 having the straight hole as shown in Fig. 2. However, since the wire has a small change of linearity and deformation in the coil, the wire is not easily bent at the cable bending portion (X or Y) and has large spring-back force, so that the wire is subject to large resistance. Thus, the wire fed from the feeding rollers does not run smoothly so that the arc becomes unstable, and then the welding quality deteriorates as in the case of wire with low elastic limit ratio.

Therefore, when the elastic limit ratio is in the range between 50 and 88 % which is neither low nor high as a compromise between these tendencies, wire is fed without large resistance at both the cable bending portion (X or Y) and the tip portion so that the arc is stabilized and welding quality is improved. That is, it is the feature of the present invention to avoid the condition wherein wire is subjected to large resistance between the wire source and the welding zone.

In accordance with the present disclosure, the relationship between arc stability and coil properties when feeding the wire automatically from the tip portion with the welding stopped, shows that the wire has a good arc stability as described above only in the specific predetermined range of coil properties.

The technology for maintaining the elastic limit ratio in the range between 50 and 88 % is not limited to the examples herein and one skilled in the art will find variations after having the benefit of the present disclosure.

Generally, in manufacturing a copper plated solid wire, the coil is controlled with coil control vertical and transverse rollers immediately after wet drawing work. As shown in Fig. 6, the wire is pressed upward, downward, leftward, and rightward by these rollers ( $D/d$  is 20, where  $D$  is roller diameter and  $d$  is wire diameter)

comprising eight to twelve vertical rollers 14 and eight to twelve transverse rollers 15. Then, the wire is wound in the pail pack or around the reel. However, if strong pressure is exerted on wire 6, portions of it get wound with short frequency (fine wound deformation) which causes unstable arcs. Fine wound deformation is due to  
5 insufficiency of the vertical and transverse rollers alone for coil bending work to control the elastic limit ratio in the range of 50 to 88 %. Thus, the object of the present invention cannot be achieved with only the vertical and transverse rollers as unstable arcs occur.

Therefore, to control the stability of the elastic limit ratio without fine wound  
10 deformation in the wire, elastic limit ratio control rollers with a ratio  $D/d$  of 40 to 60 (again where  $D$  is roller diameter and  $d$  is wire diameter) as shown in Fig. 7 are necessary immediately following the vertical and transverse rollers as shown in Fig. 6. Fig. 7 shows five U-shaped hang-on rollers on which a wire is hung in the shape of a U and the wire 6 from a pair of guide rollers 11, passes through five bending rollers  
15 12 as the vertical rollers and is drawn out of a pair of guide rollers 13. The transverse rollers which have the same configuration as the vertical ones are mounted in subsequence. In this configuration, it is possible to manufacture solid wire with no fine wound deformation that is stable in the desired elastic limit ratio. Contrary to the arrangement in Fig. 6, the U-shaped hang-on rollers as shown in Fig. 7 are required  
20 for a running path for the wire.

Referring to a following example, a preferred embodiment of the invention will be explained.

Subjected to pickling and borax coating, a rod of 5.5 mm in diameter which contains 0.06 % C, 0.9 % Si, 1.5 % Mn, 0.015 % P, 0.01 % S, and 0.11 % Ti, is  
25 drawn up to 2.2 mm in diameter, and then annealed at about 700 °C. After electrolytic-pickling (with sulfuric acid), water-cleaned, and treated with cyanic copper plating (plated copper of 3 g/kg Fe), the rod is finished as a welding solid wire of 1.2 mm in diameter at the rate of 400 m/min by drawing seven times with water-soluble lubricant used in a drawing machine. Two types of coils which are wound around a smaller  
30 reel of 20 kg after around a larger reel and wound in a pail pack, are manufactured.

To vary the elastic limit ratio of the solid wire manufactured by using coil control rollers as shown in Fig. 6, the ratio  $D/d$  is altered to 10 to 80 using the U-shaped hang-on vertical and transverse rollers followed by installed control rollers as shown in Fig. 7, and by changing the number of the vertical and transverse U-shaped  
35 hang-on rollers.

A bead of 60 cm is welded on fillet joint by flat position welding with the

following welding conditions, current of 300 A, voltage of 32 V, and shield CO<sub>2</sub> of 30 l/min.

The properties of the solid wire itself are checked by changing the coil properties for the elastic limit ratio as shown in Fig. 3. Here, the elastic limit ratio is obtained from elastic limit/tensile strength, after plotting a graph for the stress-elongation ratio of Fig. 5 from the tensile test of the solid wire and determining the elastic limit from the stress corresponding to the permanent elongation ratio of 0.05 %.

To evaluate the arc stability, the variation of current on welding, the existence of slag inclusion, the number of spatters of over 1 mm in diameter, and the state of meandering bead were all noted and recorded. The results are presented in the following Table 1.

As shown in Table 1, if the elastic limit ratio of the wire itself is controlled in the range between 50 and 88 %, it is clear that neither slag inclusion nor meandering bead occurs, resulting in decrease of current on welding and the number of spatters, so that a good welding bead can be achieved.

According to the solid welding wire with good feeding performance of the present invention described in the claims, feeding performance and arc stability are improved by controlling the elastic limit ratio (elastic limit/tensile strength) of the solid wire in the range between 50 and 88 % after final drawing in manufacturing copper plated, arc welding solid wire. Accordingly, good welding beads which have neither slag inclusion nor meandering beads, and have less spatter, can be easily achieved.

According to another variation in the invention described in the claims, three to eight elastic limit ratio control vertical rollers and three to eight elastic limit ratio control transverse rollers which have the ratio D/d of 40 to 60 are installed following coil control vertical and transverse rollers after final wire drawing work. In this arrangement, elastic limit ratio of solid wire can be easily controlled in the range between 50 and 88 %.

This disclosure is not intended to limit the present invention to the examples disclosed herein. Rather, one skilled in the art will appreciate that numerous variations are possible after studying this specification. All these variations are within the scope and spirit of the invention as claimed below.

Table 1

No.	Wire Diameter	Winding Type	Elastic Limit Ratio	Reduction Rate of Coil Diameter	Arc Height (mm/m)	Degree of Sing Inclusion	Degree of Meandering	Current Variation (A)	Spatters (No./10mm)	D/d	U-shaped Hang-on Rollers	Remarks
1			42.1	80.0	248	much	large	60	55	10	20	comparative
2			47.5	74.5	231	medium	large	48	46	35	18	comparative
3			50.0	60.0	225	none	none	10	8	40	16	present invention
4			60.1	25.0	120	none	none	7	5	48	14	present invention
5			75.2	11.0	70	none	none	6	3	50	12	present invention
6		Reel	85.4	9	50	none	none	9	8	55	10	present invention
7			88.0	9	48	none	none	15	17	60	6	present invention
8			91.2	9	50	medium	medium	49	45	65	4	comparative
9			95.0	10	50	medium	large	56	49	80	4	comparative
10			96.8	10	48	medium	large	60	52	-	0	comparative
11	1.2		43.2	80.0	246	much	large	58	54	10	20	comparative
12			48.0	73.0	235	medium	large	49	48	35	18	comparative
13			50.0	59.4	220	none	none	11	7	40	16	present invention
14			61.2	24.8	125	none	none	7	5	48	14	present invention
15		Pail Pack	76.6	11.2	72	none	none	6	3	50	12	present invention
16			86.1	8	48	none	none	8	8	55	10	present invention
17			88.0	9	47	none	none	16	16	60	6	present invention
18			92.0	9	50	medium	medium	50	45	65	4	comparative
19			94.8	10	50	medium	large	57	49	80	4	comparative
20			95.2	9	48	medium	large	58	49	-	0	comparative

PCT/80/0092660

What is claimed is:

1. An arc welding solid wire whose surface comprises copper plated film, wherein the elastic limit ratio (elastic limit/tensile strength) of the wire finally  
5 produced is controlled in the range between 50 and 88 %.
2. The arc welding solid wire of claim 1, wherein said elastic limit ratio is controlled by installing three to eight elastic limit ratio control vertical rollers and three to eight elastic limit ratio control transverse rollers which have a ratio  $D/d$  equal  
10 to 40 to 60 (where  $D$  is roller diameter and  $d$  is wire diameter) following coil control vertical and transverse rollers after final drawing.

## ABSTRACT OF THE DISCLOSURE

The invention an arc welding solid wire whose surface comprises copper plated film, wherein the elastic limit ratio (elastic limit/tensile strength) of the wire finally produced is controlled in the range between 50 and 88 % by installing three to eight elastic limit ratio control vertical rollers and three to eight elastic limit ratio control transverse rollers which have a ratio  $D/d$  equal to 40 to 60, following coil control vertical and transverse rollers after final drawing.

COPIES OF THIS DOCUMENT ARE AVAILABLE FROM THE NATIONAL ARCHIVES AT COLLEGE PARK, MARYLAND

1/5

Fig. 1A


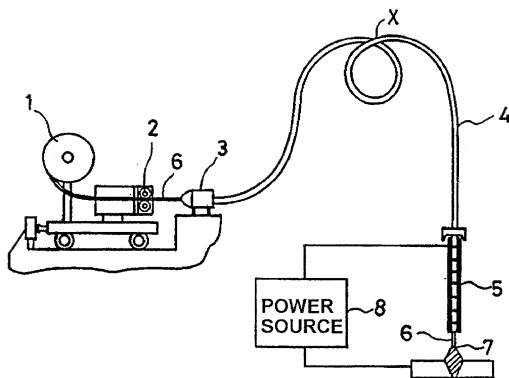


Fig. 1B

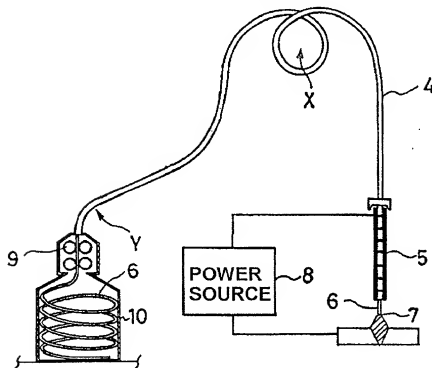

2/5

Fig. 2





Fig. 4





3/5

Fig. 3

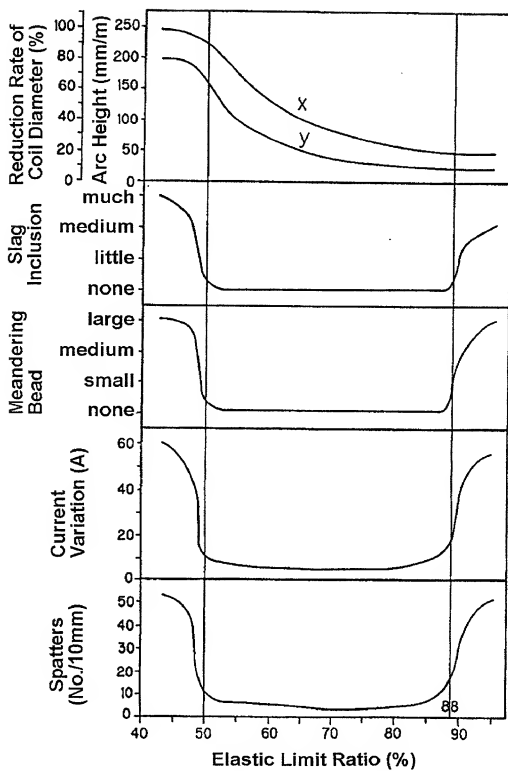


Fig. 5

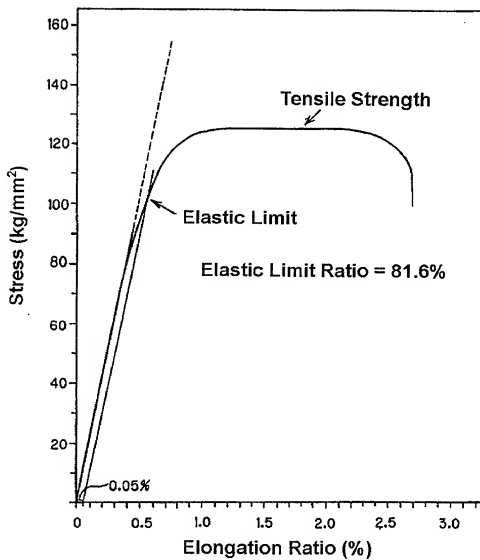


Fig. 6


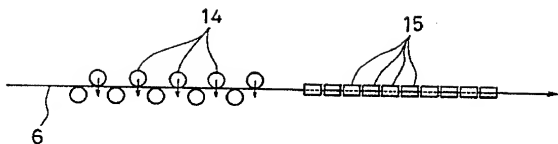


Fig. 7

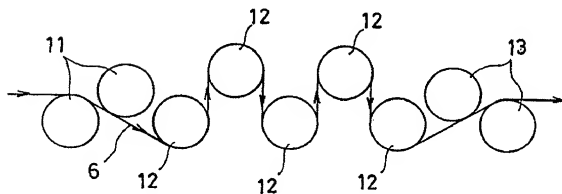

## DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY

As a below named inventor, I hereby declare that my residence, post office address and citizenship are as stated below next to my name: I believe that I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention (Design, if applicable) entitled:

**WELDING SOLID WIRE WITH HIGH FEEDING PERFORMANCE**

the specification of which (check one):

☐ is attached hereto, or ☒ was filed on: February 24, 2000 as U.S. Application Number or PCT International Application

Number: PCT/KR00/00151

and (if applicable) was amended on:

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendments referred to above. I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56. I hereby claim foreign priority benefits under Title 35, United States Code §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed.

PRIOR FOREIGN APPLICATION(S)			PRIORITY CLAIMED	
Number	Country	Day/Month/Year Filed	Yes	No
1999-47562	Japan	25/02/1999	X	

☐ Additional Priority Application(s) Listed on Following Page(s)

I HEREBY CLAIM THE BENEFIT UNDER TITLE 35 U.S. CODE §119(e) OF ANY U.S. PROVISIONAL APPLICATIONS LISTED BELOW.	
Application Number	Day/Month/Year Filed

☐ Additional Provisional Application(s) Listed on Following Page(s)

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) or PCT international application(s) designating The United States of America listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, §1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

Application Number	Filing Date	Status - Patented, Pending or Abandoned

☐ Additional US/PCT Priority Application(s) listed on Following Page(s)

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under section 1001 of title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

POWER OF ATTORNEY: I (We) hereby appoint as my (our) attorneys, with full powers of substitution and revocation, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith: J. Ernest Kenney, Reg. No. 19,179; Eugene Mar, Reg. No. 25,893; Richard E. Fischer, Reg. No. 26,382; Charles R. Wolfe, Jr., Reg. No. 28,680; Thomas J. Moore, Reg. No. 28,974; Joseph DeBenedictis, Reg. No. 28,502; Benjamin E. Urcia, Reg. No. 33,805; Chung C. Chen, Reg. No. 31,725; and

I/we authorize my(our) attorneys to accept and follow instructions from HANA INT'L Patent & Law Office regarding any matter related to the preparation, examination, grant and maintenance of this application, any continuation, continuation-in-part or divisional based thereon, and any patent resulting therefrom, until I/we or my(our) assigns withdraw this authorization in writing.

Send correspondence to: RACON & THOMAS, PLLC  
624 Slattery Lane - 4th Floor  
Alexandria, VA 22314-1176

Telephone Calls to:  
(703) 683-0500

FULL NAME OF FIRST OR SOLE INVENTOR	<u>Yukio Yamaoka</u>	CITIZENSHIP	<u>Japan</u>
RESIDENCE ADDRESS	Mohri Grand Bldg., 3-3, 1-Chome Kitahorie, Nishi-ku, Osaka 550-0014, Japan <u>JPX</u>		
DATE	<u>June 29, 2001</u>		
		SIGNATURE	<u>Y. Yamaoka</u>

ATTORNEY/DOCKET NO:  
CONTINUATION OF DECLARATION FOR PATENT APPLICATION AND APPOINTMENT OF ATTORNEY

Page 2

PRIOR FOREIGN APPLICATION(S) (35 USC §119)			PRIORITY CLAIMED	
Number	Country	Day/Month/Year Filed	Yes	No

PRIOR PROVISIONAL APPLICATIONS 35 U.S. CODE §119(E)	
Application Number	Day/Month/Year Filed

PRIOR U.S. OR PCT INTERNATIONAL APPLICATIONS (35 U.S. CODE §120)		
Application Number	Filing Date	Status - Patented, Pending or Abandoned

FULL NAME OF JOINT INVENTOR <b>Byungro PARK</b>		CITIZENSHIP <b>Korea</b>
RESIDENCE ADDRESS <b>58-2, Sungju-dong, Changwon-city, L.R. Kyoungnam, 641-120, Republic of Korea</b>		POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW
DATE <b>June 29, 2001</b>	SIGNATURE <i>[Signature]</i>	

FULL NAME OF JOINT INVENTOR <b>Dongsu HWANG</b>		CITIZENSHIP <b>Korea</b>
RESIDENCE ADDRESS <b>58-2, Sungju-dong, Changwon-city, L.R. Kyoungnam, 641-120, Republic of Korea</b>		POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW
DATE <b>June 29, 2001</b>	SIGNATURE <i>[Signature]</i>	

FULL NAME OF JOINT INVENTOR		CITIZENSHIP
RESIDENCE ADDRESS		POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW
DATE	SIGNATURE	

FULL NAME OF JOINT INVENTOR		CITIZENSHIP
RESIDENCE ADDRESS		POST OFFICE ADDRESS IS THE SAME AS RESIDENCE ADDRESS UNLESS OTHERWISE SHOWN BELOW
DATE	SIGNATURE	